

8203 64K DYNAMIC RAM CONTROLLER

- Provides All Signals Necessary to Control 64K and 16K Dynamic Memories
- Directly Addresses and Drives Up to 64 Devices Without External Drivers
- Provides Address Multiplexing and Strobes
- Provides a Refresh Timer and a Refresh Counter
- Provides Refresh/Access Arbitration
- Internal Clock Capability with the 8203-1 and the 8203-3
- Fully Compatible with Intel® 8080A, 8085A, IAPX88, and IAPX 86 Family Microprocessors
- Decodes CPU Status for Advanced Read Capability in 16K Mode with the 8203-1 and the 8203-3.
- Provides System Acknowledge and Transfer Acknowledge Signals
- Refresh Cycles May be Internally or Externally Requested (For Transparent Refresh)
- Internal Series Damping Resistors on All RAM Outputs

The Intel® 8203 is a Dynamic RAM System Controller designed to provide all signals necessary to use 64K or 16K Dynamic RAMs in microcomputer systems. The 8203 provides multiplexed addresses and address strobes, refresh logic, refresh/access arbitration. Refresh cycles can be started internally or externally. The 8203-1 and the 8203-3 support an internal crystal oscillator and Advanced Read Capability. The 8203-3 is a $\pm 5\%$ V_{CC} part.

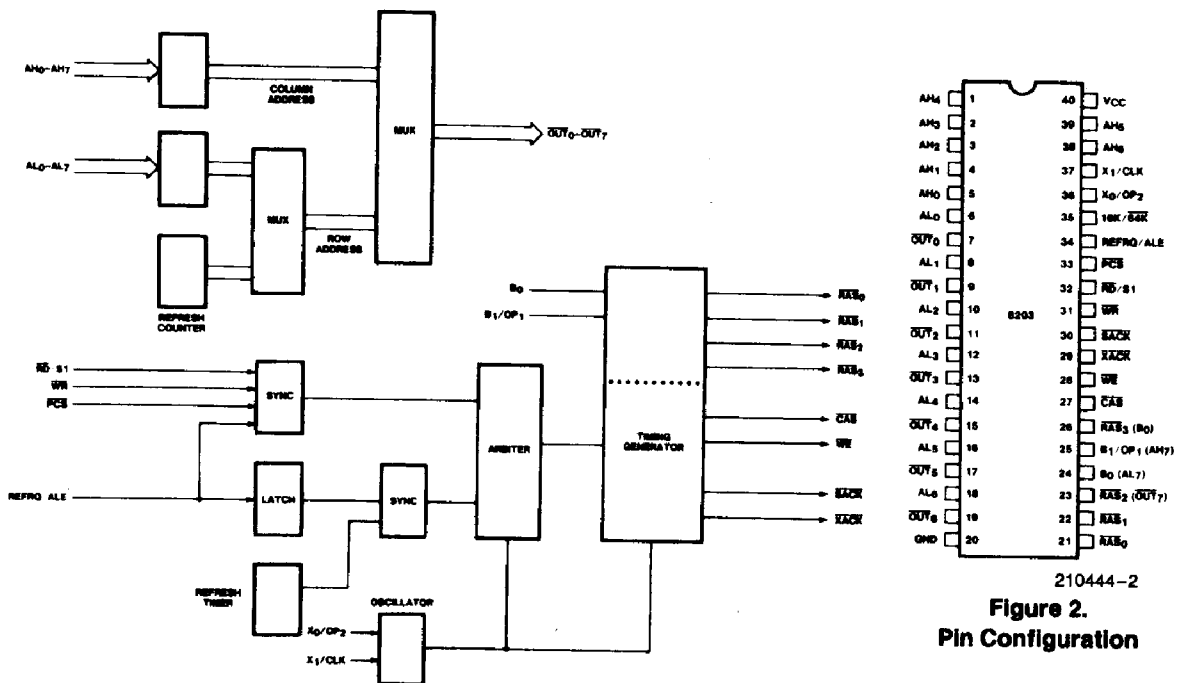


Figure 2.
Pin Configuration

Figure 1. 8203 Block Diagram

Table 1. Pin Descriptions

Symbol	Pin No.	Type	Name and Function
AL ₀ AL ₁ AL ₂ AL ₃ AL ₄ AL ₅ AL ₆	6 8 10 12 14 16 18	I I I I I I I	ADDRESS LOW: CPU address inputs used to generate memory row address.
AH ₀ AH ₁ AH ₂ AH ₃ AH ₄ AH ₅ AH ₆	5 4 3 2 1 39 38	I I I I I I I	ADDRESS HIGH: CPU address inputs used to generate memory column address.
B ₀ /AL ₇ B ₁ /OP ₁ / AH ₇	24 25	I I	BANK SELECT INPUTS: Used to gate the appropriate $\overline{\text{RAS}}$ output for a memory cycle. B ₁ /OP ₁ option used to select the Advanced Read Mode. (Not available in 64K mode.) See Figure 5. When in 64K RAM Mode, pins 24 and 25 operate as the AL ₇ and AH ₇ address inputs.
$\overline{\text{PCS}}$	33	I	PROTECTED CHIP SELECT: Used to enable the memory read and write inputs. Once a cycle is started, it will not abort even if $\overline{\text{PCS}}$ goes inactive before cycle completion.
WR	31	I	MEMORY WRITE REQUEST.
RD/S1	32	I	MEMORY READ REQUEST: S1 function used in Advanced Read mode selected by OP ₁ (pin 25).
REFRQ/ ALE	34	I	EXTERNAL REFRESH REQUEST: ALE function used in Advanced Read mode, selected by OP ₁ (pin 25).
$\overline{\text{OUT}}_0$ $\overline{\text{OUT}}_1$ $\overline{\text{OUT}}_2$ $\overline{\text{OUT}}_3$ $\overline{\text{OUT}}_4$ $\overline{\text{OUT}}_5$ $\overline{\text{OUT}}_6$	7 9 11 13 15 17 19	O O O O O O O	OUTPUT OF THE MULTIPLEXER: These outputs are designed to drive the addresses of the Dynamic RAM array. (Note that the $\overline{\text{OUT}}_{0-7}$ pins do not require inverters or drivers for proper operation.)
$\overline{\text{WE}}$	28	O	WRITE ENABLE: Drives the Write Enable inputs of the Dynamic RAM array.
$\overline{\text{CAS}}$	27	O	COLUMN ADDRESS STROBE: This output is used to latch the Column Address into the Dynamic RAM array.
$\overline{\text{RAS}}_0$ $\overline{\text{RAS}}_1$ $\overline{\text{RAS}}_2$ / $\overline{\text{OUT}}_7$ $\overline{\text{RAS}}_3$ /B ₀	21 22 23 26	O O O I/O	ROW ADDRESS STROBE: Used to latch the Row Address into the bank of dynamic RAMs, selected by the 8203 Bank Select pins (B ₀ , B ₁ /OP ₁). In 64K mode, only $\overline{\text{RAS}}_0$ and $\overline{\text{RAS}}_1$ are available; pin 23 operates as $\overline{\text{OUT}}_7$ and pin 26 operates as the B ₀ bank select input.
XACK	29	O	TRANSFER ACKNOWLEDGE: This output is a strobe indicating valid data during a read cycle or data written during a write cycle. XACK can be used to latch valid data from the RAM array.

Table 1. Pin Descriptions (Continued)

Symbol	Pin No.	Type	Name and Function
$\overline{\text{SACK}}$	30	O	SYSTEM ACKNOWLEDGE: This output indicates the beginning of a memory access cycle. It can be used as an advanced transfer acknowledge to eliminate wait states. (Note: If a memory access request is made during a refresh cycle, $\overline{\text{SACK}}$ is delayed until $\overline{\text{XACK}}$ in the memory access cycle).
X_0/OP_2 X_1/CLK	36 37	I/O I/O	OSCILLATOR INPUTS: These inputs are designed for a quartz crystal to control the frequency of the oscillator. If X_0/OP_2 is shorted to pin 40 (V_{CC}) or if X_0/OP_2 is connected to +12V through a 1 K Ω resistor then X_1/CLK becomes a TTL input for an external clock. (Note: Crystal mode for the 8203-1 and the 8203-3 only).
16K/64K	35	I	MODE SELECT: This input selects 16K mode or 64K mode. Pins 23–26 change function based on the mode of operation.
V_{CC}	40		POWER SUPPLY: +5V.
GND	20		GROUND.

FUNCTIONAL DESCRIPTION

The 8203 provides a complete dynamic RAM controller for microprocessor systems as well as expansion memory boards.

The 8203 has two modes, one for 16K dynamic RAMs and one for 64Ks, controlled by pin 35.

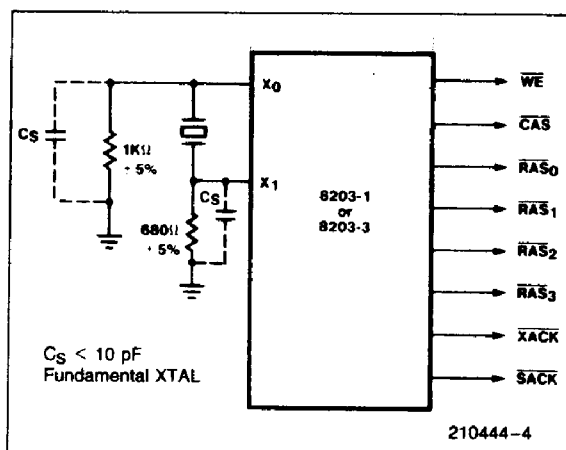


Figure 3. Crystal Operation for the 8203-1 and 8203-3

All 8203 timing is generated from a single reference clock. This clock is provided via an external oscillator or an on-chip crystal oscillator. All output signal

transitions are synchronous with respect to this clock reference, except for the trailing edges of the CPU handshake signals $\overline{\text{SACK}}$ and $\overline{\text{XACK}}$.

CPU memory requests normally use the $\overline{\text{RD}}$ and $\overline{\text{WR}}$ inputs. The Advanced-Read mode allows ALE and S1 to be used in place of the $\overline{\text{RD}}$ input.

Failsafe refresh is provided via an internal timer which generates refresh requests. Refresh requests can also be generated via the REFRQ input.

An on-chip synchronizer/arbitrator prevents memory and refresh requests from affecting a cycle in progress. The READ, WRITE, and external REFRESH requests may be asynchronous to the 8203 clock; on-chip logic will synchronize the requests, and the arbitrator will decide if the requests should be delayed, pending completion of a cycle in progress.

16K/64 Option Selection

Pin 35 is a strap input that controls the two 8203 modes. Figure 4 shows the four pins that are multiplexed. In 16K mode (pin 35 tied to V_{CC} or left open), the 8203 has two Bank Select inputs to select one of four RAS outputs. In this mode, the 8203 is exactly compatible with the Intel 8202A Dynamic RAM Controller. In 64K mode (pin 35 tied to GND), there is only one Bank Select input (pin 26) to select the two RAS outputs. More than two banks of 64K dynamic RAMs can be used with external logic.

If a Read cycle is requested while a refresh cycle is in progress, then the 8203 will set the internal delayed-SACK latch. When the Read cycle is eventually started, the 8203 will delay the active SACK transition until XACK goes active, as shown in the A.C. timing diagrams. This delay was designed to compensate for the CPU's READY setup and hold times. The delayed-SACK latch is cleared after every READ cycle.

Based on system requirements, either SACK or XACK can be used to generate the CPU READY signal. XACK will normally be used; if the CPU can tolerate an advanced READY, then SACK can be used, but only if the CPU can tolerate the amount of advance provided by SACK. If SACK arrives too early to provide the appropriate number of WAIT states, then either XACK or a delayed form of SACK should be used.

Write Cycles

Write cycles are similar to Normal Read cycles, except for the WE output. WE is held inactive for Read cycles, but goes active for Write cycles. All 8203 Write cycles are "early-write" cycles; WE goes active before CAS goes active by an amount of time sufficient to keep the dynamic RAM output buffers turned off.

General System Considerations

All memory requests (Normal Reads, Advanced Reads, Writes) are qualified by the PCS input. PCS should be stable, either active or inactive, prior to the leading edge of RD, WR, or ALE. Systems which use battery backup should pullup PCS to prevent erroneous memory requests.

In order to minimize propagation delay, the 8203 uses an inverting address multiplexer without latches. The system must provide adequate address setup and hold times to guarantee RAS and CAS setup and hold times for the RAM. The t_{AD} A.C. parameter should be used for this system calculation.

The B_0 - B_1 inputs are similar to the address inputs in that they are not latched. B_0 and B_1 should not be changed during a memory cycle, since they directly control which RAS output is activated.

The 8203 uses a two-stage synchronizer for the memory request inputs (RD, WR, ALE), and a separate two stage synchronizer for the external refresh input (REFRQ). As with any synchronizer, there is always a finite probability of metastable states inducing system errors. The 8203 synchronizer was

designed to have a system error rate less than 1 memory cycle every three years based on the full operating range of the 8203.

A microprocessor system is concerned when the data is valid after RD goes low. See Figure 9. In order to calculate memory read access times, the dynamic RAM's A.C. specifications must be examined, especially the RAS-access time (t_{RAC}) and the CAS-access time (t_{CAC}). Most configurations will be CAS-access limited; i.e., the data from the RAM will be stable $t_{cc,max}(8203) + t_{CAC}(RAM)$ after a memory read cycle is started. Be sure to add any delays (due to buffers, data latches, etc.) to calculate the overall read access time.

Since the 8203 normally performs "early-write" cycles, the data must be stable at the RAM data inputs by the time CAS goes active, including the RAM's data setup time. If the system does not normally guarantee sufficient write data setup, you must either delay the WR input signal or delay the 8203 WE output.

Delaying the WR input will delay all 8203 timing, including the READY handshake signals, SACK and XACK, which may increase the number of WAIT states generated by the CPU.

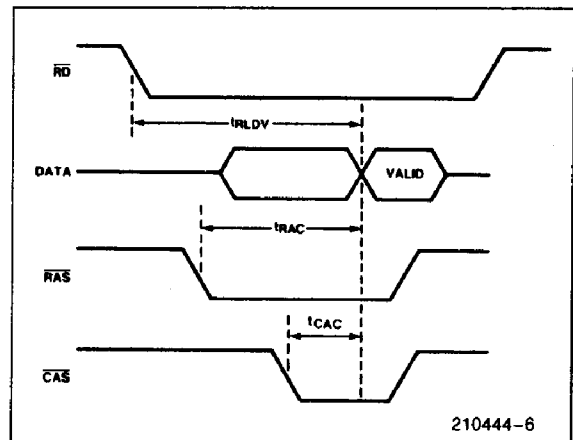


Figure 9. Read Access Time

If the WE output is externally delayed beyond the CAS active transition, then the RAM will use the falling edge of WE to strobe the write data into the RAM. This WE transition should not occur too late during the CAS active transition, or else the WE to CAS requirements of the RAM will not be met.

The RAS_{0-3} , CAS , OUT_{0-7} , and WE outputs contain on-chip series damping resistors (typically 20Ω) to minimize overshoot.

Some dynamic RAMs require more than 2.4V V_{IH} . Noise immunity may be improved for these RAMs by

adding pull-up resistors to the 8203's outputs. Intel RAMs do not require pull-up resistors.


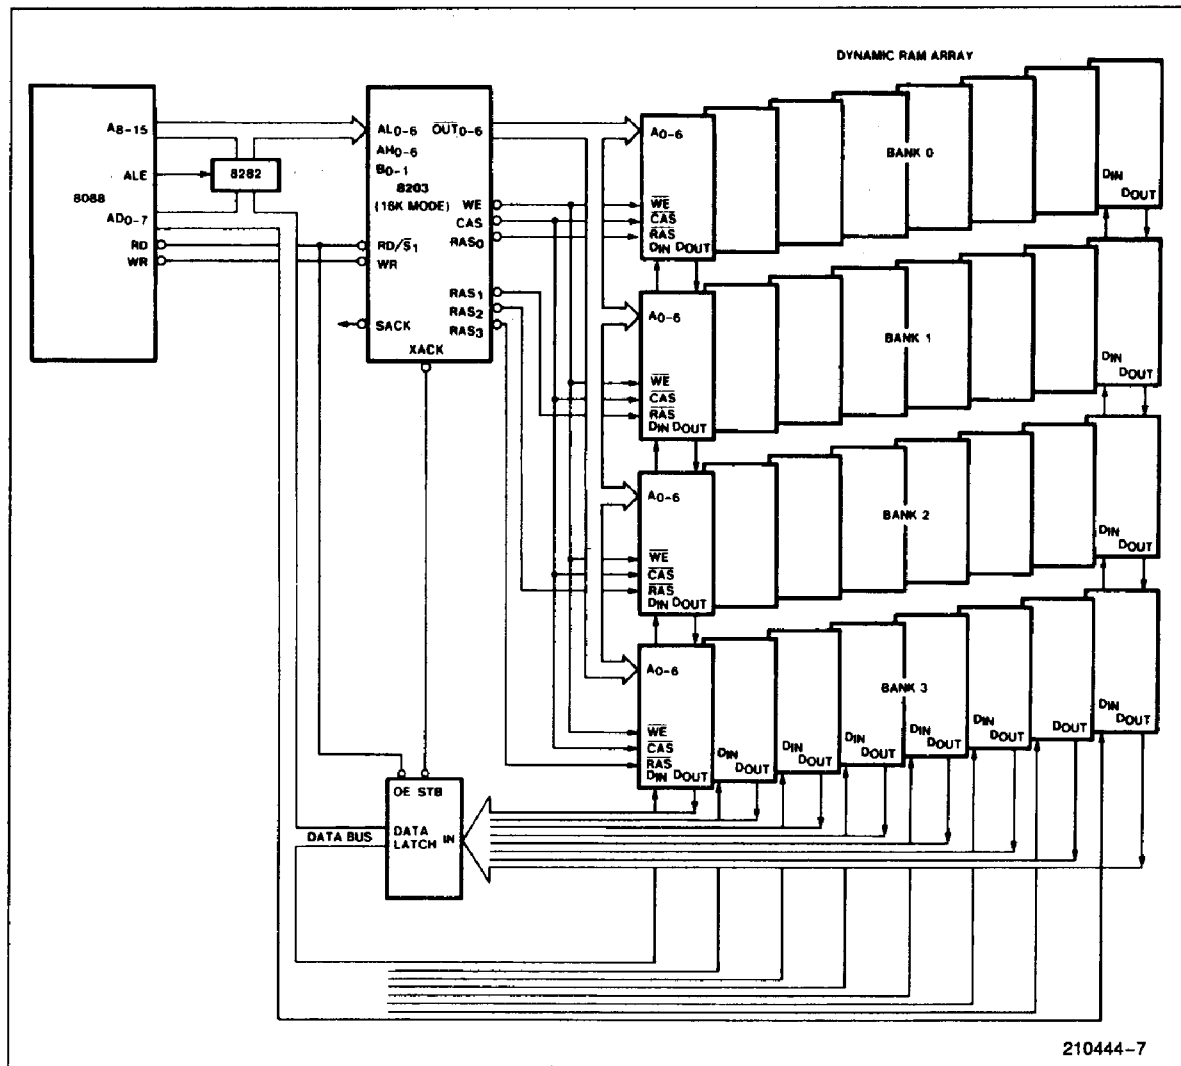


Figure 10. Typical 8088 System



ABSOLUTE MAXIMUM RATINGS*

Ambient Temperature Under Bias 0°C to 70°C
 Storage Temperature -65°C to +150°C
 Voltage On Any Pin
 With Respect to Ground -0.5V to +7V
 Power Dissipation 1.6 Watts


**Notice: Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.*

D.C. CHARACTERISTICS $T_A = 0^\circ\text{C to } 70^\circ\text{C}; V_{CC} = 5.0\text{V} \pm 10\%$ (5.0V $\pm 5\%$ for 8203-3); GND = 0V

Symbol	Parameter	Min	Max	Units	Test Conditions
V_{CC}	Input Clamp Voltage		-1.0	V	$I_C = -5\text{ mA}$
I_{CC}	Power Supply Current		290	mA	
I_F	Forward Input Current CLK, 64K/16K Mode Select All Other Inputs(3)		-2.0 -320	mA μA	$V_F = 0.45\text{V}$ $V_F = 0.45\text{V}$
I_R	Reverse Input Current(3)		40	μA	$V_R = V_{CC}(1, 5)$
V_{OL}	Output Low Voltage SACK, XACK All Other Outputs		0.45 0.45	V V	$I_{OL} = 5\text{ mA}$ $I_{OL} = 3\text{ mA}$
V_{OH}	Output High Voltage SACK, XACK All Other Outputs	2.4 2.6		V V	$V_{IL} = 0.65\text{V}$ $I_{OH} = -1\text{ mA}$ $I_{OH} = -1\text{ mA}$
V_{IL}	Input Low Voltage		0.8	V	$V_{CC} = 5.0\text{V}(2)$
V_{IH1}	Input High Voltage	2.0	V_{CC}	V	$V_{CC} = 5.0\text{V}$
V_{IH2}	Option Voltage		V_{CC}	V	(4)
C_{IN}	Input Capacitance		30	pF	$F = 1\text{ MHz}(6)$ $V_{BIAS} = 2.5\text{V}, V_{CC} = 5\text{V}$

NOTES:

- $I_R = 200\text{ }\mu\text{A}$ for pin 37 (CLK).
- For test mode RD & WR must be held at GND.
- Except for pin 36 in XTAL mode.
- 8203-1 and 8203-3 support both OP₁ and OP₂, 8203 only supports OP₂.

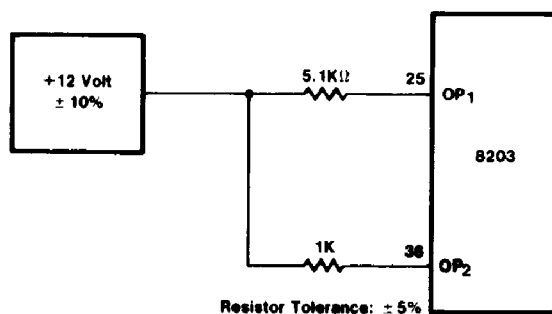

- $I_R = 150\text{ }\mu\text{A}$ for pin 35 (Mode Select 16K/64K).
- Sampled not 100% tested, $T_A = 25^\circ\text{C}$.

210444-3

A.C. CHARACTERISTICS

$T_J = 0^\circ\text{C to } 70^\circ\text{C}$; $V_{CC} = 5\text{V} \pm 10\%$ (5.0V $\pm 5\%$ for 8203-3); GND = 0V

Measurements made with respect to $\overline{\text{RAS}}_0$ – $\overline{\text{RAS}}_3$, $\overline{\text{CAS}}$, $\overline{\text{WE}}$, $\overline{\text{OUT}}_0$ – $\overline{\text{OUT}}_6$ are at 2.4V and 0.8V. All other pins are measured at 1.5V. All times are in ns.

Symbol	Parameter	Min	Max	Notes
t_p	Clock Period	40	54	
t_{PH}	External Clock High Time	20		
t_{PL}	External Clock Low Time—Above ($>$) 20 MHz	17		
t_{PL}	External Clock Low Time—Below (\leq) 20 MHz	20		
t_{RC}	Memory Cycle Time	$10t_p - 30$	$12t_p$	4, 5
t_{REF}	Refresh Time (128 cycles)	$264t_p$	$288t_p$	
t_{RP}	$\overline{\text{RAS}}$ Precharge Time	$4t_p - 30$		
t_{RSH}	$\overline{\text{RAS}}$ Hold After $\overline{\text{CAS}}$	$5t_p - 30$		3
t_{ASR}	Address Setup to $\overline{\text{RAS}}$	$t_p - 30$		3
t_{RAH}	Address Hold From $\overline{\text{RAS}}$	$t_p - 10$		3
t_{ASC}	Address Setup to $\overline{\text{CAS}}$	$t_p - 30$		3
t_{CAH}	Address Hold from $\overline{\text{CAS}}$	$5t_p - 20$		3
t_{CAS}	$\overline{\text{CAS}}$ Pulse Width	$5t_p - 10$		
t_{WCS}	$\overline{\text{WE}}$ Setup to $\overline{\text{CAS}}$	$t_p - 40$		
t_{WCH}	$\overline{\text{WE}}$ Hold After $\overline{\text{CAS}}$	$5t_p - 35$		8
t_{RS}	$\overline{\text{RD}}$, $\overline{\text{WR}}$, ALE, REFRQ Delay From $\overline{\text{RAS}}$	$5t_p$		2, 6
t_{MRP}	$\overline{\text{RD}}$, $\overline{\text{WR}}$ Setup to $\overline{\text{RAS}}$	0		5
t_{RMS}	REFRQ Setup to $\overline{\text{RD}}$, $\overline{\text{WR}}$	$2t_p$		6
t_{RMP}	REFRQ Setup to $\overline{\text{RAS}}$	$2t_p$		5
t_{PCS}	$\overline{\text{PCS}}$ Setup to $\overline{\text{RD}}$, $\overline{\text{WR}}$, ALE	20		
t_{AL}	S1 Setup to ALE	15		
t_{LA}	S1 Hold From ALE	30		
t_{CR}	$\overline{\text{RD}}$, $\overline{\text{WR}}$, ALE to $\overline{\text{RAS}}$ Delay	$t_p + 30$	$2t_p + 70$	2
t_{CC}	$\overline{\text{RD}}$, $\overline{\text{WR}}$, ALE to $\overline{\text{CAS}}$ Delay	$t_p + 25$	$4t_p + 85$	2
t_{SC}	CMD Setup to Clock	15		1
t_{MRS}	$\overline{\text{RD}}$, $\overline{\text{WR}}$ Setup to REFRQ	5		2
t_{CA}	$\overline{\text{RD}}$, $\overline{\text{WR}}$, ALE to $\overline{\text{SACK}}$ Delay		$2t_p + 47$	2, 9
t_{CX}	$\overline{\text{CAS}}$ to $\overline{\text{XACK}}$ Delay	$5t_p - 25$	$5t_p + 20$	
t_{CS}	$\overline{\text{CAS}}$ to $\overline{\text{SACK}}$ Delay	$5t_p - 25$	$5t_p + 40$	2, 10
t_{ACK}	$\overline{\text{XACK}}$ to $\overline{\text{CAS}}$ Setup	10		
t_{XW}	$\overline{\text{XACK}}$ Pulse Width	$t_p - 25$		7
t_{CK}	$\overline{\text{SACK}}$, $\overline{\text{XACK}}$ Turn-Off Delay		35	
t_{KCH}	CMD Inactive Hold After $\overline{\text{SACK}}$, $\overline{\text{XACK}}$	10		

A.C. CHARACTERISTICS (Continued)

$T_J = 0^\circ\text{C to } 70^\circ\text{C}$; $V_{CC} = 5\text{V} \pm 10\%$ (5.0V $\pm 5\%$ for 8203-3); $GND = 0\text{V}$

Measurements made with respect to $\overline{\text{RAS}}_0$ – $\overline{\text{RAS}}_3$, $\overline{\text{CAS}}$, $\overline{\text{WE}}$, OUT_0 – OUT_6 are at 2.4V and 0.8V. All other pins are measured at 1.5V. All times are in ns.


Symbol	Parameter	Min	Max	Notes
t_{LL}	REFRQ Pulse Width	20		
t_{CHS}	CMD Hold Time	30		11
t_{RFR}	REFRQ to $\overline{\text{RAS}}$ Delay		$4t_p + 100$	6
t_{WW}	$\overline{\text{WR}}$ to $\overline{\text{WE}}$ Delay	0	50	8
t_{AD}	CPU Address Delay	0	40	3

NOTES:

1. t_{SC} is a reference point only. ALE, $\overline{\text{RD}}$, $\overline{\text{WR}}$, and REFRQ inputs do not have to be externally synchronized to 8203 clock.
2. If t_{RS} min and t_{MRS} min are met then t_{CA} , t_{CR} , and t_{CC} are valid, otherwise t_{CS} is valid.
3. t_{ASR} , t_{RAH} , t_{ASC} , t_{CAH} , and t_{RSH} depend upon B_0 – B_1 and CPU address remaining stable throughout the memory cycle. The address inputs are not latched by the 8203.
4. For back-to-back refresh cycles, t_{RC} max = 13 t_p .
5. t_{RC} max is valid only if t_{RMP} min is met (READ, WRITE followed by REFRESH) or t_{MRP} min is met (REFRESH followed by READ, WRITE).
6. t_{RFR} is valid only if t_{RS} min and t_{MRS} min are met.
7. t_{XW} min applies when $\overline{\text{RD}}$, $\overline{\text{WR}}$ has already gone high. Otherwise $\overline{\text{XACK}}$ follows $\overline{\text{RD}}$, $\overline{\text{WR}}$.
8. $\overline{\text{WE}}$ goes high according to t_{WCH} or t_{WW} , whichever occurs first.
9. t_{CA} applies only when in normal SACK mode.
10. t_{CS} applies only when in delayed SACK mode.
11. t_{CHS} must be met only to ensure a SACK active pulse when in delayed SACK mode. $\overline{\text{XACK}}$ will always be activated for at least t_{XW} ($t_p - 25$ ns). Violating t_{CHS} min does not otherwise affect device operation.

WAVEFORMS


Normal Read or Write Cycle

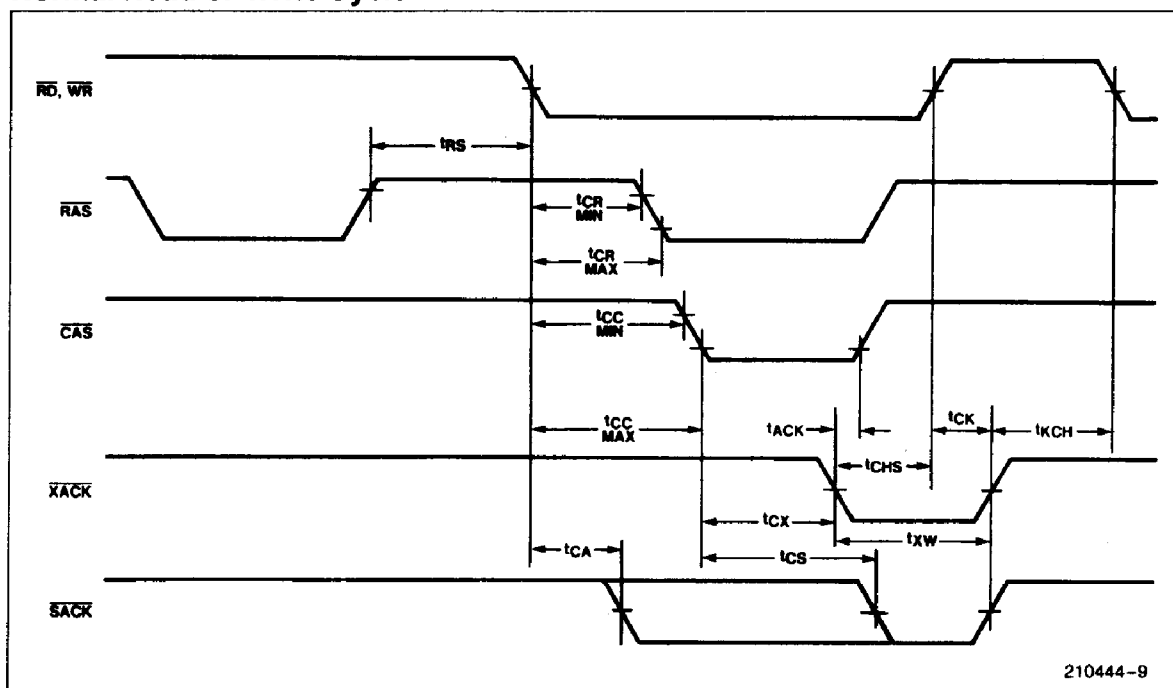


210444-9

WAVEFORMS (Continued)

Advanced Read Mode

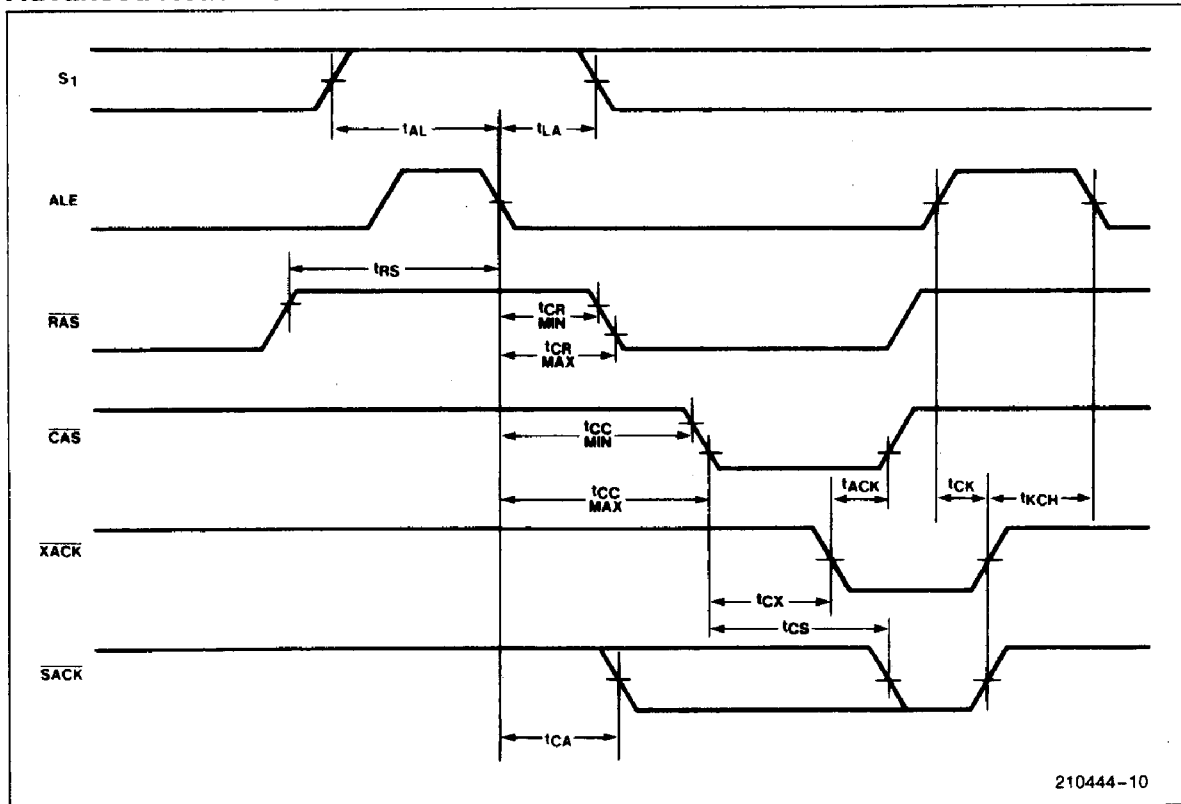


Memory Compatibility Timing

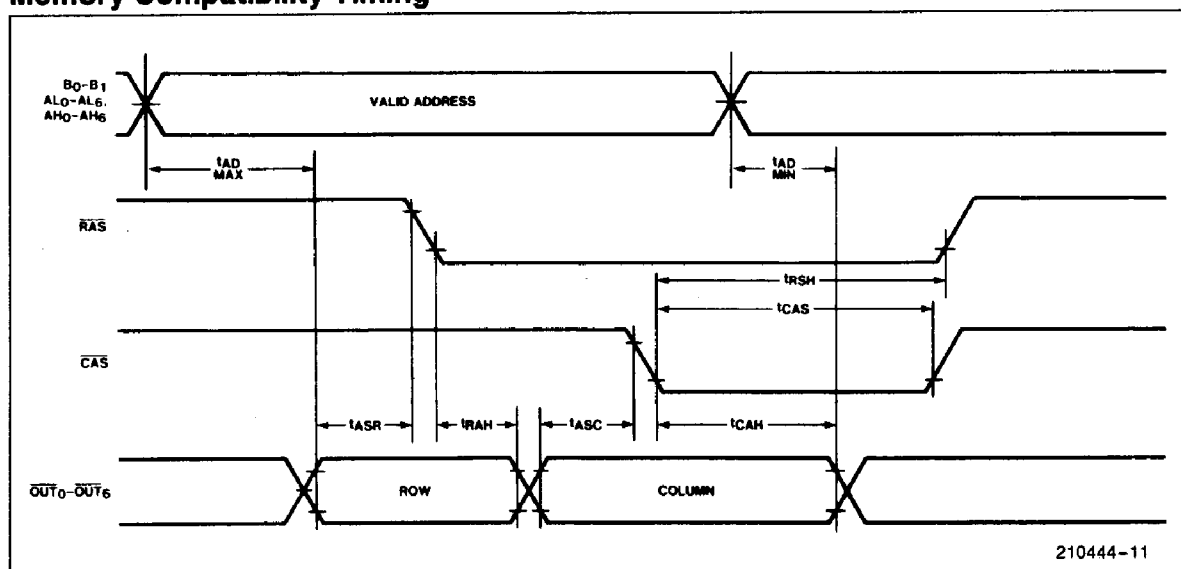


WAVEFORMS (Continued)

Write Cycle Timing

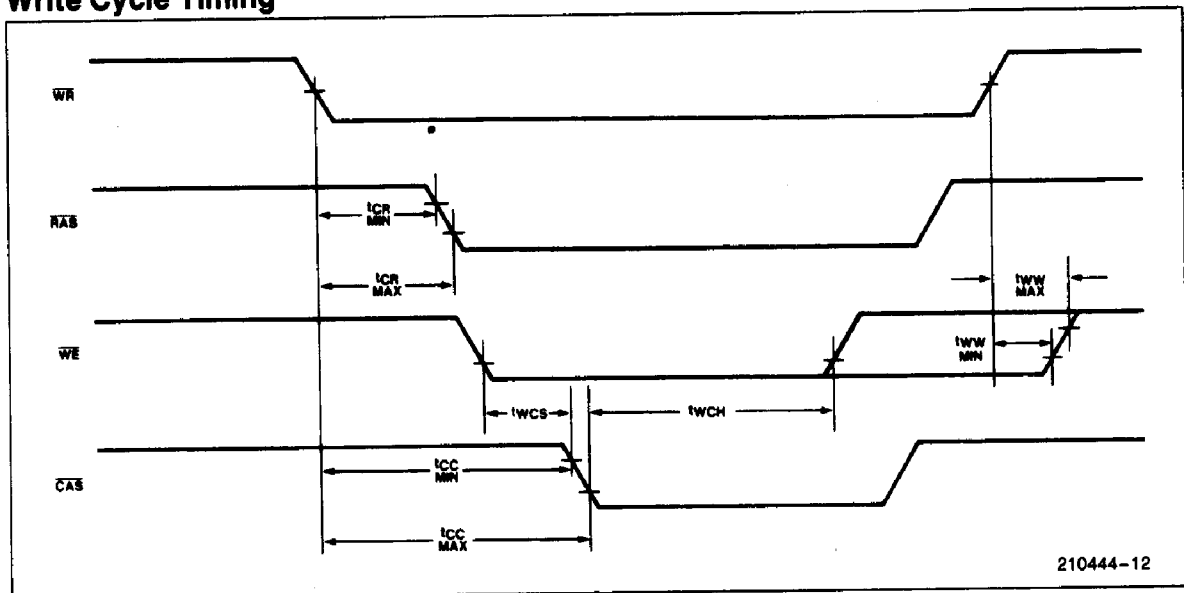


Read or Write Followed By External Refresh

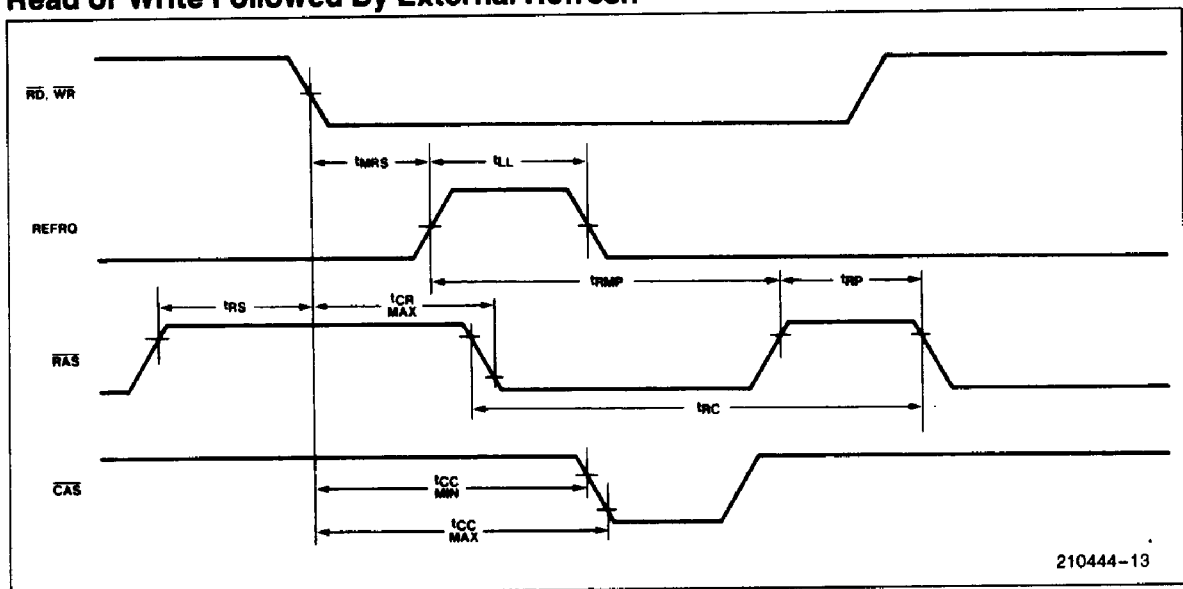

WAVEFORMS (Continued)

External Refresh Followed By Read or Write

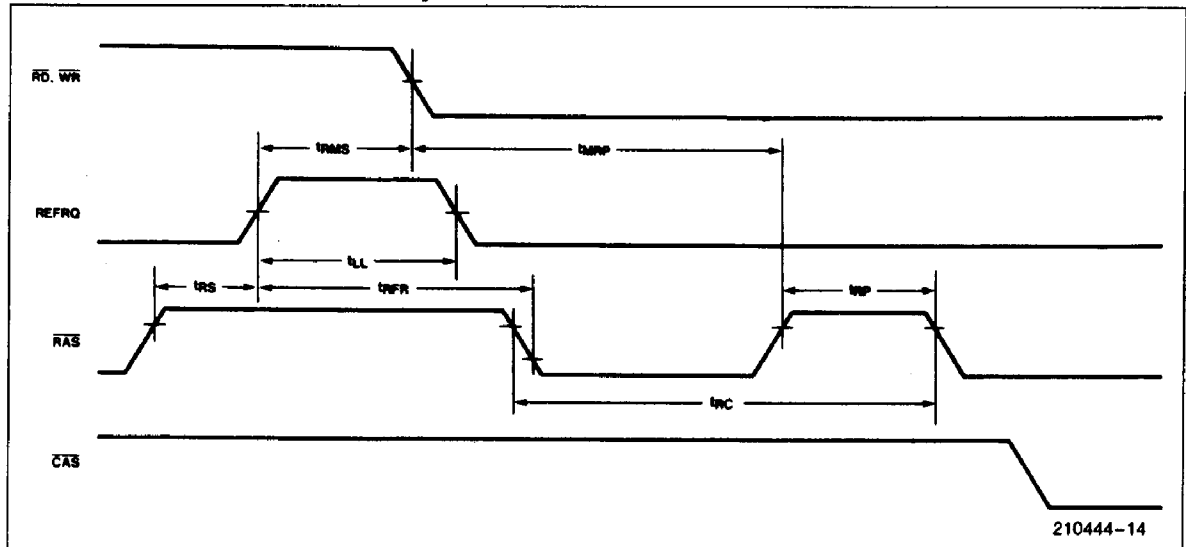

Clock and System Timing


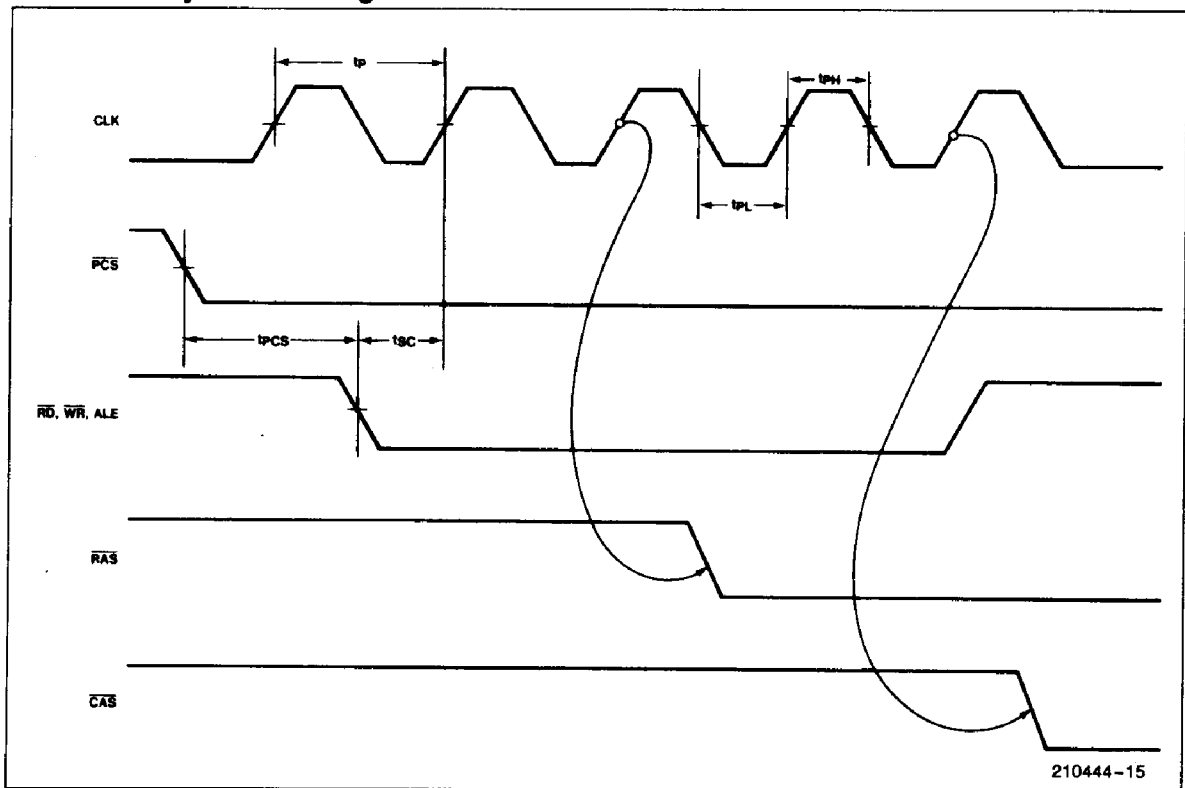


Table 2. 8203 Output Loading. All specifications are for the Test Load unless otherwise noted.

Pin	Test Load
$\overline{\text{SACK}}, \overline{\text{XACK}}$	$C_L = 30 \text{ pF}$
$\overline{\text{OUT}}_0 - \overline{\text{OUT}}_6$	$C_L = 160 \text{ pF}$
$\overline{\text{RAS}}_0 - \overline{\text{RAS}}_3$	$C_L = 60 \text{ pF}$
$\overline{\text{WE}}$	$C_L = 224 \text{ pF}$
$\overline{\text{CAS}}$	$C_L = 320 \text{ pF}$

A.C. TESTING LOAD CIRCUIT

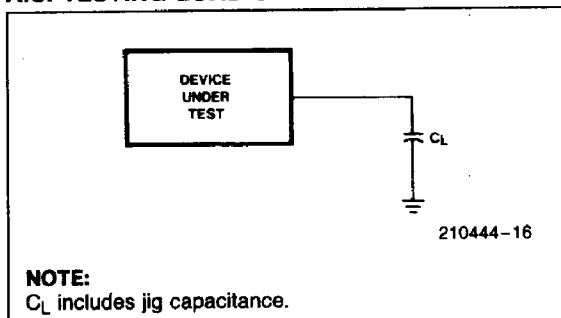

The typical rising and falling characteristic curves for the $\overline{\text{OUT}}$, $\overline{\text{RAS}}$, $\overline{\text{CAS}}$ and $\overline{\text{WE}}$ output buffers can be used to determine the effects of capacitive loading on the A.C. Timing Parameters. Using this design tool in conjunction with the timing waveforms, the designer can determine typical timing shifts based on system capacitive load.

Example: Find the effect on t_{CR} and t_{CC} using 32 64K Dynamic RAMs configured in 2 banks.

- 1) Determine the typical $\overline{\text{RAS}}$ and $\overline{\text{CAS}}$ capacitance:
 From the data sheet $\overline{\text{RAS}} = 5 \text{ pF}$ and $\overline{\text{CAS}} = 5 \text{ pF}$.
 $\therefore \overline{\text{RAS}} \text{ load} = 80 \text{ pF} + \text{board capacitance}$.
 $\overline{\text{CAS}} \text{ load} = 160 \text{ pF} + \text{board capacitance}$.
 Assume 2 pF/in (trace length) for board capacitance and for this example 4 inches for $\overline{\text{RAS}}$ and 8 inches for $\overline{\text{CAS}}$.
- 2) From the waveform diagrams, we determine that the falling edge timing is needed for t_{CR} and t_{CC} . Next find the curve that *best* approximates the test load; i.e., 68 pF for $\overline{\text{RAS}}$ and 330 pF for $\overline{\text{CAS}}$.
- 3) If we use 88 pF for $\overline{\text{RAS}}$ loading, then t_{CR} (min.) spec should be increased by about 1 ns, and t_{CR} (max.) spec should be increased by *about* 2 ns. Similarly if we use 176 pF for $\overline{\text{CAS}}$, then t_{CC} (min.) should decrease by 3 ns and t_{CC} (max.) should decrease by about 7 ns.

